


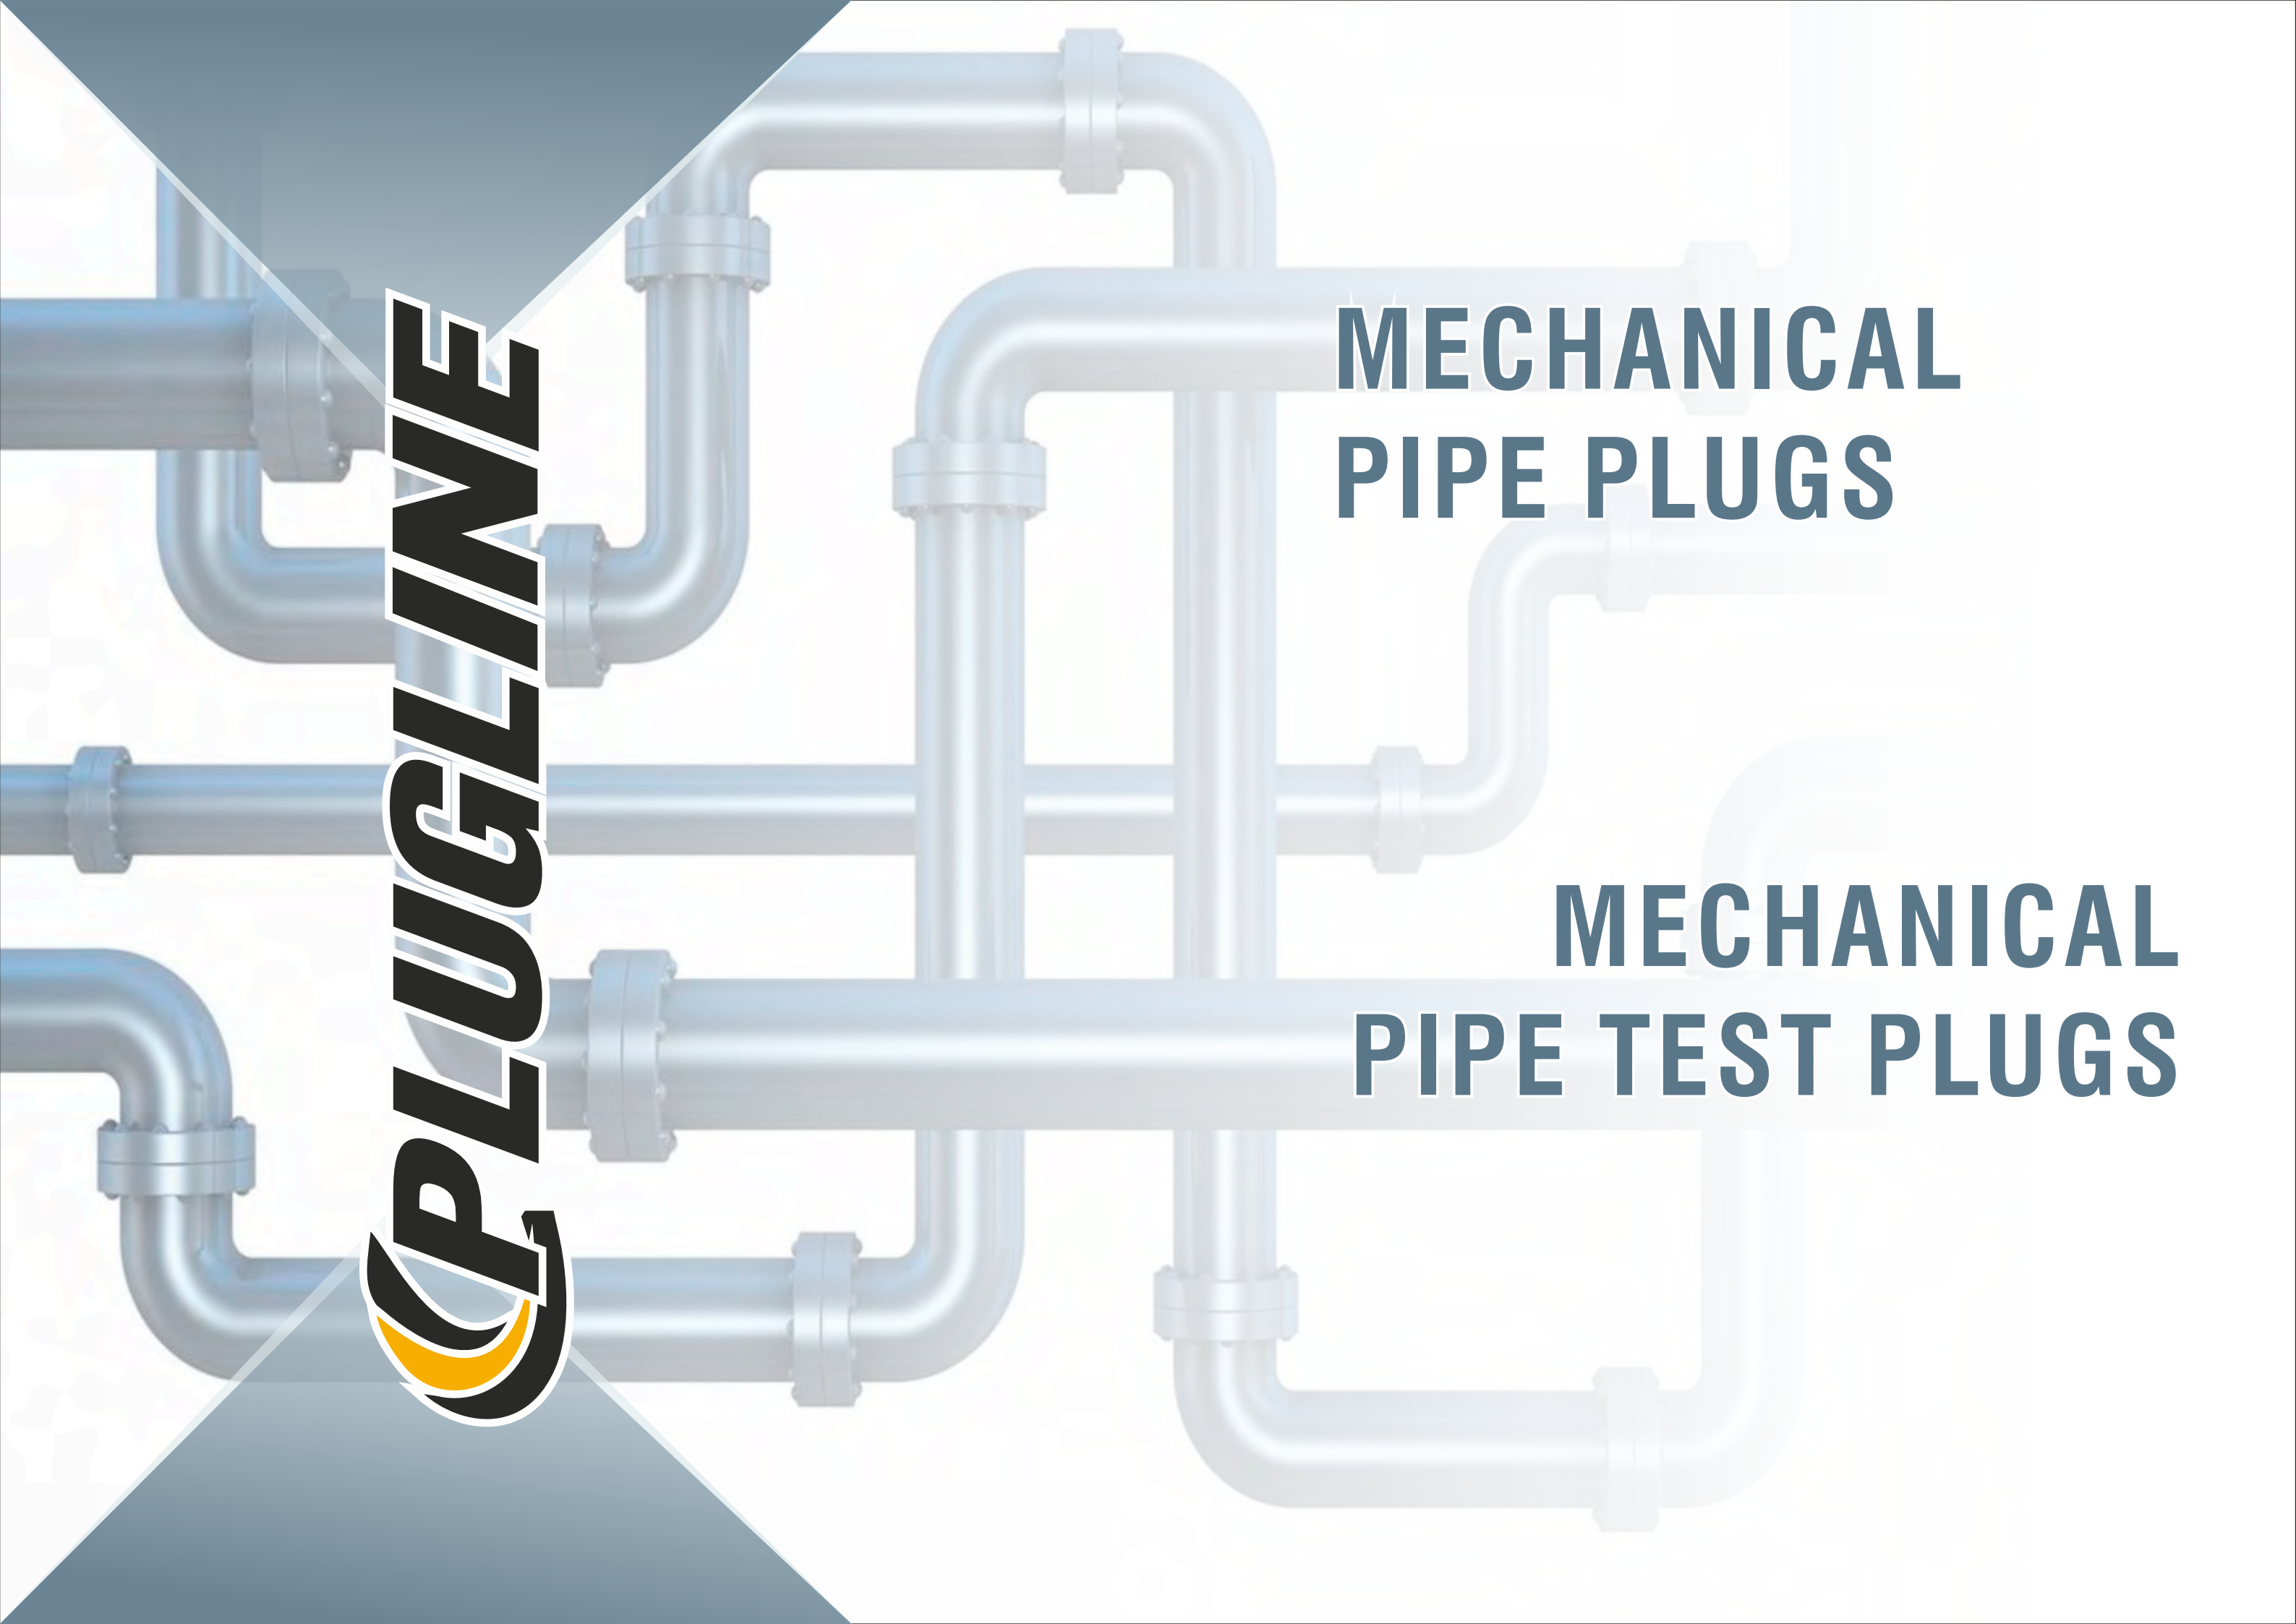

CP PLUGLINE


**MECHANICAL
PIPE PLUGS**

**MECHANICAL
PIPE TEST PLUGS**

STEEL TEST PLUGS





Customizable -
Modified Upon
Customers Needs



With
Bypass

Product Description

Designed for testing and locating leaks of sewers, drainage systems, pipelines, and gullies. Produced as double seals plug according to customer needs and application requirements. They are ideal for pipe testing, and they are safe to use in conditions where the flow must continue or be diverted during pipe repair.

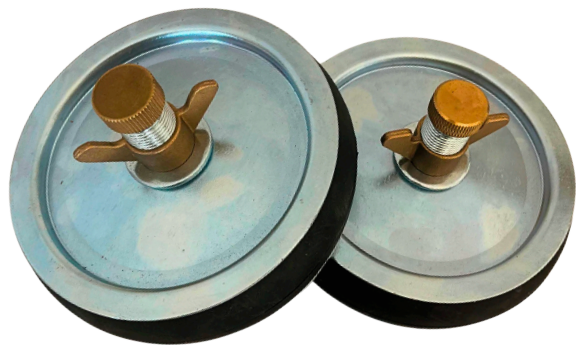

15mm to
300mm



Back Pressure
0,5 and 2,5 Bar



Material
Choice



-20/+80 °C



Corrosion
Resistant



Safe
Operation




Light
Weight

STEEL TEST PLUGS (0,5BAR/7,25PSI - 2,5BAR/36,26PSI)

Product Code	Nominal Size (mm)	Min. Pipe Inner Dia. to be tested (mm/inch)	Max. Pipe Inner Dia. to be tested (mm/inch)	Product Diameter (mm/inch)	SCH STD Pipe Inner Diameter (mm/inch)	Back Pressure (bar/psi)	Bypass Diameter (inch)	Product Length (mm/inch)	Product Weight (kg/lbs)
STP15	15	15mm/0,59"	18mm/0,71"	14mm/0,55"	15,76mm/0,62"	2,5bar/36,26psi	M8	122mm/4,8"	0,07kg/0,15lbs
STP20	20	19mm/0,75"	24mm/0,94"	18mm/0,71"	20,96mm/0,83"	2,5bar/36,26psi	M8	122mm/4,8"	0,1kg/0,22lbs
STP25	25	25mm/0,98"	38mm/1,5"	24mm/0,94"	26,64mm/1,05"	2,5bar/36,26psi	M10	122mm/4,8"	0,11kg/0,24lbs
STP32	32	33mm/1,3"	44mm/1,73"	32mm/1,26"	35,08mm/1,38"	2,5bar/36,26psi	12,70mm/ 1/2"	85mm/3,35"	0,16kg/0,35lbs
STP40	40	39mm/1,54"	53mm/2,09"	38mm/1,5"	40,94mm/1,61"	2,5bar/36,26psi	12,70mm/ 1/2"	85mm/3,35"	0,22kg/0,48lbs
STP50	50	51mm/2,01"	66mm/2,6"	50mm/1,97"	52,48mm/2,07"	2,5bar/36,26psi	12,70mm/ 1/2"	85mm/3,35"	0,33kg/0,73lbs
STP65	65	61mm/2,4"	79mm/3,11"	60mm/2,36"	62,68mm/2,47"	2,5bar/36,26psi	12,70mm/ 1/2"	85mm/3,35"	0,26kg/0,57lbs
STP80	80	76mm/2,99"	89mm/3,5"	75mm/2,95"	77,92mm/3,07"	1,5bar/21,76psi	12,70mm/ 1/2"	82mm/3,23"	0,3kg/0,66lbs
STP90	90	85mm/3,35"	103mm/4,06"	84mm/3,31"	90,12mm/3,55"	1bar/14,5psi	12,70mm/ 1/2"	85mm/3,35"	0,39kg/0,86lbs
STP100	100	99mm/3,9"	112mm/4,41"	98mm/3,86"	102,26mm/4,03"	0,7bar/10,15psi	12,70mm/ 1/2"	85mm/3,35"	0,41kg/0,9lbs
STP115	115	110mm/4,33"	128mm/5,04"	109mm/4,29"	117mm/4,61"	0,7bar/10,15psi	12,70mm/ 1/2"	85mm/3,35"	0,54kg/1,19lbs
STP125	125	126mm/4,96"	139mm/5,47"	125mm/4,92"	128,2mm/5,05"	0,5bar/7,25psi	12,70mm/ 1/2"	85mm/3,35"	0,55kg/1,21lbs
STP140	140	135mm/5,31"	152mm/5,98"	134mm/5,28"	141mm/5,55"	0,5bar/7,25psi	12,70mm/ 1/2"	85mm/3,35"	0,71kg/1,56lbs
STP150	150	149mm/5,87"	164mm/6,46"	148mm/5,83"	154,08mm/6,07"	0,5bar/7,25psi	12,70mm/ 1/2"	85mm/3,35"	0,71kg/1,56lbs
STP175	175	171mm/6,73"	196mm/7,72"	170mm/6,69"	178mm/7,01"	0,5bar/7,25psi	25,40mm/ 1"	139mm/5,47"	1,79kg/3,95lbs
STP200	200	195mm/7,68"	218mm/8,58"	194mm/7,64"	202,64mm/7,98"	0,5bar/7,25psi	25,40mm/ 1"	134,5mm/5,3"	1,96kg/4,32lbs
STP225	225	219mm/8,62"	245mm/9,65"	218mm/8,58"	227mm/8,94"	0,5bar/7,25psi	25,40mm/ 1"	134,5mm/5,3"	2,31kg/5,09lbs
STP250	250	246mm/9,69"	290mm/11,42"	244mm/9,61"	254,46mm/10,02"	0,5bar/7,25psi	25,40mm/ 1"	176mm/6,93"	3,07kg/6,77lbs
STP275	275	272mm/10,71"	305mm/12,01"	270mm/10,63"	279mm/10,98"	0,5bar/7,25psi	25,40mm/ 1"	200,75mm/7,9"	3,62kg/7,98lbs
STP300	300	297mm/11,69"	335mm/13,19"	295mm/11,61"	304,84mm/12"	0,5bar/7,25psi	25,40mm/ 1"	208,75mm/8,22"	4,07kg/8,97lbs


STEEL TEST PLUGS

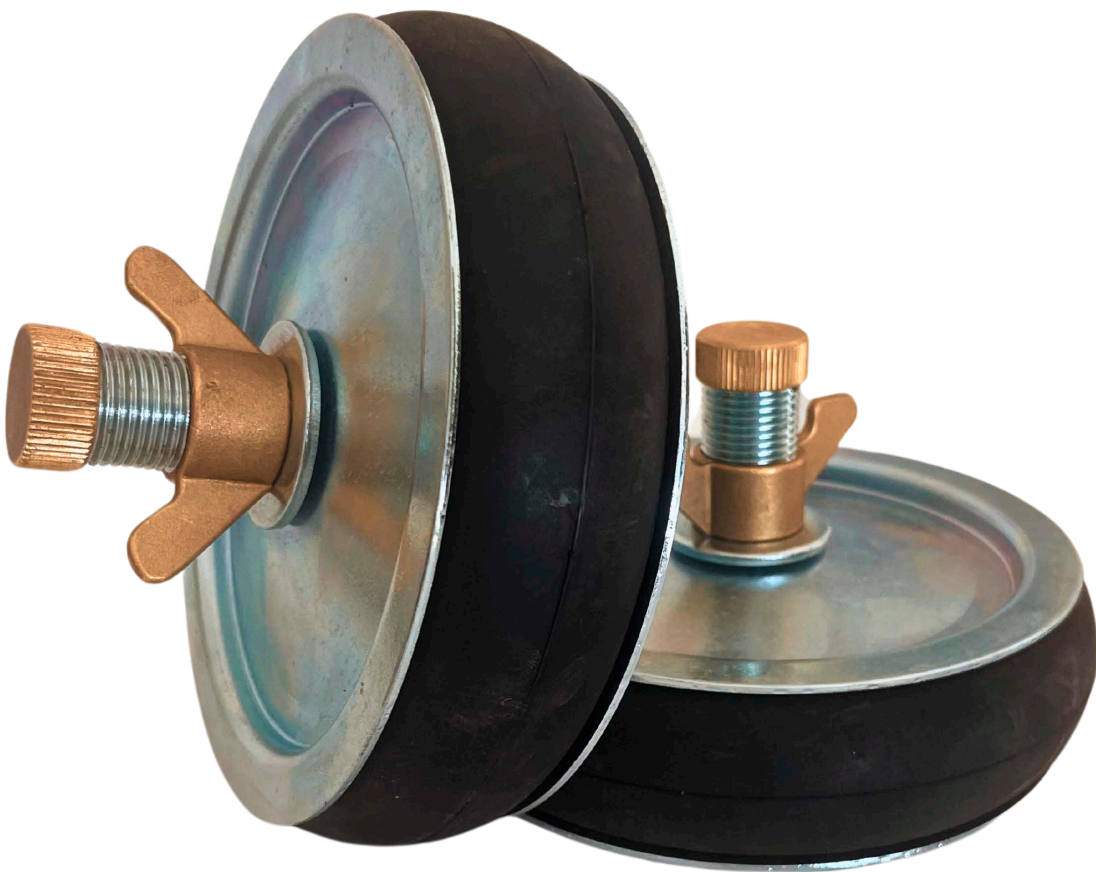

DOUBLE SEAL STEEL TEST PLUGS




Customizable -
Modified Upon
Customers Needs



With
Bypass

Product Description

Designed for testing, locating leaks, and isolating pipe sections in sewer, drainage, and pipeline systems. Produced with a durable steel body and double-seal structure, DSTP plugs provide reliable mechanical sealing during inspection, maintenance, and low-pressure testing. The bypass connection allows controlled filling, drainage, or flow diversion when required.



15mm to
300mm



Back Pressure
0,70 to 3,75 Bar



Material
Choice



-20/+80 °C



Corrosion
Resistant



Safe
Operation



Light
Weight

DOUBLE STEEL TEST PLUGS (0,7BAR/10,15PSI - 3,75BAR/54,39PSI)

Product Code	Nominal Size (mm)	Min. Pipe Inner Dia. to be tested (mm/Inch)	Max. Pipe Inner Dia. to be tested (mm/Inch)	Product Diameter (mm/Inch)	SCH STD Pipe Inner Diameter (mm/Inch)	Back Pressure (bar/psi)	Bypass Diameter (Inch)	Product Length (mm/Inch)	Product Weight (kg/lbs)
DSTP15	15	15mm/0,59"	18mm/0,71"	14mm/0,55"	15,76mm/0,62"	3,75bar/54,39psi	M8	122mm/4,8"	0,09kg/0,19lbs
DSTP20	20	19mm/0,75"	24mm/0,94"	18mm/0,71"	20,96mm/0,83"	3,75bar/54,39psi	M8	122mm/4,8"	0,11kg/0,24lbs
DSTP25	25	25mm/0,98"	38mm/1,5"	24mm/0,94"	26,64mm/1,05"	3,75bar/54,39psi	M10	122mm/4,8"	0,12kg/0,27lbs
DSTP32	32	33mm/1,3"	44mm/1,73"	32mm/1,26"	35,08mm/1,38"	3,75bar/54,39psi	12,70mm/ 1/2"	125mm/4,92"	0,27kg/0,6lbs
DSTP40	40	39mm/1,54"	53mm/2,09"	38mm/1,5"	40,94mm/1,61"	3,75bar/54,39psi	12,70mm/ 1/2"	125mm/4,92"	0,35kg/0,77lbs
DSTP50	50	51mm/2,01"	66mm/2,6"	50mm/1,97"	52,48mm/2,07"	3,75bar/54,39psi	12,70mm/ 1/2"	125mm/4,92"	0,54kg/1,19lbs
DSTP65	65	61mm/2,4"	79mm/3,11"	60mm/2,36"	62,68mm/2,47"	3,75bar/54,39psi	12,70mm/ 1/2"	125mm/4,92"	0,43kg/0,96lbs
DSTP80	80	76mm/2,99"	89mm/3,5"	75mm/2,95"	77,92mm/3,07"	2,25bar/32,63psi	12,70mm/ 1/2"	159mm/6,26"	0,54kg/1,18lbs
DSTP90	90	85mm/3,35"	103mm/4,06"	84mm/3,31"	90,12mm/3,55"	1,25bar/18,13psi	12,70mm/ 1/2"	159mm/6,26"	0,7kg/1,53lbs
DSTP100	100	99mm/3,9"	112mm/4,41"	98mm/3,86"	102,26mm/4,03"	0,9bar/13,05psi	12,70mm/ 1/2"	125mm/4,92"	0,71kg/1,56lbs
DSTP115	115	110mm/4,33"	128mm/5,04"	109mm/4,29"	117mm/4,61"	0,9bar/13,05psi	12,70mm/ 1/2"	125mm/4,92"	0,97kg/2,14lbs
DSTP125	125	126mm/4,96"	139mm/5,47"	125mm/4,92"	128,2mm/5,05"	0,9bar/13,05psi	12,70mm/ 1/2"	125mm/4,92"	0,99kg/2,18lbs
DSTP140	140	135mm/5,31"	152mm/5,98"	134mm/5,28"	141mm/5,55"	0,9bar/13,05psi	12,70mm/ 1/2"	125mm/4,92"	1,31kg/2,88lbs
DSTP150	150	149mm/5,87"	164mm/6,46"	148mm/5,83"	154,08mm/6,07"	0,7bar/10,15psi	12,70mm/ 1/2"	125mm/4,92"	1,31kg/2,88lbs
DSTP175	175	171mm/6,73"	196mm/7,72"	170mm/6,69"	178mm/7,01"	0,7bar/10,15psi	25,40mm/ 1"	250mm/9,84"	3,07kg/6,77lbs
DSTP200	200	195mm/7,68"	218mm/8,58"	194mm/7,64"	202,64mm/7,98"	0,7bar/10,15psi	25,40mm/ 1"	170mm/6,69"	3,26kg/7,19lbs
DSTP225	225	219mm/8,62"	245mm/9,65"	218mm/8,58"	227mm/8,94"	0,7bar/10,15psi	25,40mm/ 1"	149mm/5,87"	3,92kg/8,64lbs
DSTP250	250	246mm/9,69"	290mm/11,42"	244mm/9,61"	254,46mm/10,02"	0,7bar/10,15psi	25,40mm/ 1"	250mm/9,84"	5,51kg/12,15lbs
DSTP275	275	272mm/10,71"	305mm/12,01"	270mm/10,63"	279mm/10,98"	0,7bar/10,15psi	25,40mm/ 1"	295mm/11,61"	6,71kg/14,78lbs
DSTP300	300	297mm/11,69"	335mm/13,19"	295mm/11,61"	304,84mm/12"	0,7bar/10,15psi	25,40mm/ 1"	311mm/12,24"	7,54kg/16,62lbs


DOUBLE SEAL STEEL TEST PLUGS



TOTTIGHT STEEL TEST PLUGS



Customizable -
Modified Upon
Customers Needs




With
Bypass

Product Description

The Tottight Steel Test Plug by Plugline is a robust and versatile tool specifically designed for sealing and testing pipes at their ends or openings. It features a durable top and bottom flange system with tightening bolts on the top flange. Tightening the bolts compresses the rubber seal between the flanges, ensuring a secure and reliable seal. The plug includes ergonomic handles on the top flange for easy handling and positioning, along with a built-in bypass system for controlled flow management during sealing or blockage operations.

This test plug is ideal for use in a variety of applications, including:

- Sanitary systems for air and water testing or temporary sealing.
- Sewage pipelines for maintenance, testing, or flow management.
- Industrial pipelines requiring reliable pipe-end sealing and testing.
- Municipal infrastructure projects for pipe blockage and flow control during repairs or installations.



325mm to
2000mm



Back Pressure
0,1 To 0,5 bar



Material
Choice



-20/+80 °C



Corrosion
Resistant



Safe
Operation



Light
Weight




TOTTIGHT STEEL TEST PLUGS

TOTTIGHT STEEL TEST PLUGS (0,1bar/1,45PSI - 0,5bar/7,25PSI)

Product Code	Nominal Size (mm)	Min. Pipe Inner Dia. to be tested (mm/Inch)	Max. Pipe Inner Dia. to be tested (mm/Inch)	Product Diameter (mm/Inch)	SCH STD Pipe Inner Diameter	Back Pressure (bar/psi)	Bypass Diameter (Inch)	Product Length (mm/Inch)	Product Weight (kg/lbs)
TSTP325	325	315mm/12,4"	355mm/13,98"	310mm/12,2"	-	0,5bar/7,25psi	2"	126,4mm/4,98"	8,19kg/18,05lbs
TSTP350	350	337mm/13,27"	380mm/14,96"	335mm/13,19"	336,54mm/13,25"	0,5bar/7,25psi	2"	126,4mm/4,98"	9,21kg/20,3lbs
TSTP375	375	365mm/14,37"	405mm/15,94"	360mm/14,17"	-	0,5bar/7,25psi	2"	126,4mm/4,98"	10,18kg/22,44lbs
TSTP400	400	387mm/15,24"	430mm/16,93"	385mm/15,16"	387,34mm/15,25"	0,5bar/7,25psi	2"	126,4mm/4,98"	11,2kg/24,68lbs
TSTP425	425	415mm/16,34"	455mm/17,91"	410mm/16,14"	-	0,5bar/7,25psi	2"	126,4mm/4,98"	12,26kg/27,02lbs
TSTP450	450	438mm/17,24"	480mm/18,9"	435mm/17,13"	437,94mm/17,24"	0,3bar/4,35psi	2"	126,4mm/4,98"	13,37kg/29,47lbs
TSTP475	475	465mm/18,31"	505mm/19,88"	460mm/18,11"	-	0,3bar/4,35psi	2"	126,4mm/4,98"	14,53kg/32,02lbs
TSTP500	500	489mm/19,25"	530mm/20,87"	485mm/19,09"	488,94mm/19,25"	0,3bar/4,35psi	2"	126,4mm/4,98"	15,73kg/34,66lbs
TSTP525	525	515mm/20,28"	555mm/21,85"	510mm/20,08"	-	0,3bar/4,35psi	2"	126,4mm/4,98"	17,07kg/37,62lbs
TSTP550	550	540mm/21,26"	580mm/22,83"	535mm/21,06"	539,94mm/21,26"	0,2bar/2,9psi	2"	126,4mm/4,98"	18,36kg/40,47lbs
TSTP575	575	565mm/22,24"	605mm/23,82"	560mm/22,05"	-	0,2bar/2,9psi	2"	126,4mm/4,98"	19,71kg/43,43lbs
TSTP600	600	590mm/23,23"	630mm/24,8"	585mm/23,03"	590,94mm/23,27"	0,2bar/2,9psi	2"	126,4mm/4,98"	21,11kg/46,53lbs
TSTP625	625	615mm/24,21"	655mm/25,79"	610mm/24,02"	-	0,2bar/2,9psi	2"	126,4mm/4,98"	22,53kg/49,65lbs
TSTP650	650	640mm/25,2"	680mm/26,77"	635mm/25"	640,94mm/25,23"	0,2bar/2,9psi	2"	126,4mm/4,98"	24kg/52,9lbs
TSTP675	675	665mm/26,18"	705mm/27,76"	660mm/25,98"	-	0,2bar/2,9psi	2"	126,4mm/4,98"	25,72kg/56,68lbs
TSTP700	700	690mm/27,17"	730mm/28,74"	685mm/26,97"	691,94mm/27,24"	0,2bar/2,9psi	2"	126,4mm/4,98"	27,29kg/60,14lbs
TSTP725	725	715mm/28,15"	755mm/29,72"	710mm/27,95"	-	0,2bar/2,9psi	2"	126,4mm/4,98"	28,91kg/63,71lbs
TSTP750	750	740mm/29,13"	780mm/30,71"	735mm/28,94"	742,94mm/29,25"	0,2bar/2,9psi	2"	126,4mm/4,98"	30,57kg/67,38lbs
TSTP775	775	765mm/30,12"	805mm/31,69"	760mm/29,92"	-	0,2bar/2,9psi	2"	126,4mm/4,98"	32,28kg/71,15lbs
TSTP800	800	790mm/31,1"	830mm/32,68"	785mm/30,91"	793,94mm/31,26"	0,2bar/2,9psi	2"	126,4mm/4,98"	35,05kg/77,25lbs
TSTP825	825	815mm/32,09"	855mm/33,66"	810mm/31,89"	-	0,2bar/2,9psi	2"	126,4mm/4,98"	39,2kg/86,39lbs
TSTP850	850	840mm/33,07"	880mm/34,65"	835mm/32,87"	844,94mm/33,27"	0,2bar/2,9psi	2"	126,4mm/4,98"	41,16kg/90,71lbs
TSTP875	875	865mm/34,06"	905mm/35,63"	860mm/33,86"	-	0,2bar/2,9psi	2"	126,4mm/4,98"	43,16kg/95,13lbs
TSTP900	900	890mm/35,04"	930mm/36,61"	885mm/34,84"	894,94mm/35,23"	0,2bar/2,9psi	2"	126,4mm/4,98"	45,2kg/99,62lbs
TSTP925	925	915mm/36,02"	955mm/37,6"	910mm/35,83"	-	0,2bar/2,9psi	2"	126,4mm/4,98"	47,32kg/104,28lbs
TSTP950	950	940mm/37,01"	980mm/38,58"	935mm/36,81"	945,94mm/37,24"	0,2bar/2,9psi	2"	126,4mm/4,98"	49,54kg/109,18lbs
TSTP975	975	965mm/37,99"	1005mm/39,57"	960mm/37,8"	-	0,2bar/2,9psi	2"	126,4mm/4,98"	51,65kg/113,84lbs
TSTP1000	1000	990mm/38,98"	1030mm/40,55"	985mm/38,78"	996,94mm/39,25"	0,2bar/2,9psi	2"	160mm/6,3"	71,09kg/156,68lbs
TSTP1025	1025	1015mm/39,96"	1055mm/41,54"	1010mm/39,76"	-	0,1bar/1,45psi	2"	160mm/6,3"	74,03kg/163,17lbs
TSTP1050	1050	1040mm/40,94"	1080mm/42,52"	1035mm/40,75"	1047,94mm/41,26"	0,1bar/1,45psi	2"	160mm/6,3"	80,81kg/178,11lbs
TSTP1075	1075	1065mm/41,93"	1105mm/43,5"	1060mm/41,73"	-	0,1bar/1,45psi	2"	160mm/6,3"	83,68kg/184,44lbs
TSTP1100	1100	1090mm/42,91"	1130mm/44,49"	1085mm/42,72"	1098,94mm/43,27"	0,1bar/1,45psi	2"	160mm/6,3"	86,69kg/191,06lbs
TSTP1125	1125	1115mm/43,9"	1155mm/45,47"	1110mm/43,7"	-	0,1bar/1,45psi	2"	160mm/6,3"	89,91kg/198,16lbs
TSTP1150	1150	1140mm/44,88"	1180mm/46,46"	1135mm/44,69"	1148,94mm/45,23"	0,1bar/1,45psi	2"	160mm/6,3"	94,03kg/207,24lbs
TSTP1175	1175	1165mm/45,87"	1205mm/47,44"	1160mm/45,67"	-	0,1bar/1,45psi	2"	160mm/6,3"	97,17kg/214,16lbs
TSTP1200	1200	1190mm/46,85"	1230mm/48,43"	1185mm/46,65"	1199,94mm/47,24"	0,1bar/1,45psi	2"	160mm/6,3"	100,71kg/221,96lbs
TSTP1225	1225	1215mm/47,83"	1255mm/49,41"	1210mm/47,64"	-	0,1bar/1,45psi	2"	160mm/6,3"	103,94kg/229,08lbs
TSTP1250	1250	1240mm/48,82"	1280mm/50,39"	1235mm/48,62"	-	0,1bar/1,45psi	2"	160mm/6,3"	107,17kg/236,2lbs
TSTP1275	1275	1265mm/49,8"	1305mm/51,38"	1260mm/49,61"	-	0,1bar/1,45psi	2"	160mm/6,3"	111,07kg/244,79lbs
TSTP1300	1300	1290mm/50,79"	1330mm/52,36"	1285mm/50,59"	-	0,1bar/1,45psi	2"	160mm/6,3"	114,14kg/251,56lbs
TSTP1325	1325	1315mm/51,77"	1355mm/53,35"	1310mm/51,57"	-	0,1bar/1,45psi	2"	160mm/6,3"	118,37kg/260,88lbs
TSTP1350	1350	1340mm/52,76"	1380mm/54,33"	1335mm/52,56"	-	0,1bar/1,45psi	2"	160mm/6,3"	121,53kg/267,85lbs
TSTP1375	1375	1365mm/53,74"	1405mm/55,31"	1360mm/53,54"	-	0,1bar/1,45psi	2"	160mm/6,3"	124,83kg/275,13lbs
TSTP1400	1400	1390mm/54,72"	1430mm/56,3"	1385mm/54,53"	-	0,1bar/1,45psi	2"	160mm/6,3"	132,2kg/291,36lbs
TSTP1425	1425	1415mm/55,71"	1455mm/57,28"	1410mm/55,51"	-	0,1bar/1,45psi	2"	160mm/6,3"	136,09kg/299,95lbs
TSTP1450	1450	1440mm/56,69"	1480mm/58,27"	1435mm/56,5"	-	0,1bar/1,45psi	2"	160mm/6,3"	139,64kg/307,76lbs
TSTP1475	1475	1465mm/57,68"	1505mm/59,25"	1460mm/57,48"	-	0,1bar/1,45psi	2"	160mm/6,3"	143,63kg/316,57lbs
TSTP1500	1500	1490mm/58,66"	1530mm/60,24"	1485mm/58,46"	-	0,1bar/1,45psi	2"	213mm/8,39"	171,84kg/378,73lbs
TSTP1525	1525	1515mm/59,65"	1555mm/61,22"	1510mm/59,45"	-	0,1bar/1,45psi	2"	213mm/8,39"	174,96kg/385,62lbs
TSTP1550	1550	1540mm/60,63"	1580mm/62,2"	1535mm/60,43"	-	0,1bar/1,45psi	2"	213mm/8,39"	181,46kg/399,94lbs
TSTP1575	1575	1565mm/61,61"	1605mm/63,19"	1560mm/61,42"	-	0,1bar/1,45psi	2"	213mm/8,39"	184,56kg/406,78lbs
TSTP1600	1600	1590mm/62,6"	1630mm/64,17"	1585mm/62,4"	-	0,1bar/1,45psi	2"	213mm/8,39"	189,61kg/417,9lbs
TSTP1625	1625	1615mm/63,58"	1655mm/65,16"	1610mm/63,39"	-	0,1bar/1,45psi	2"	213mm/8,39"	192,75kg/424,83lbs
TSTP1650	1650	1640mm/64,57"	1680mm/66,14"	1635mm/64,37"	-	0,1bar/1,45psi	2"	213mm/8,39"	198,3kg/437,06lbs
TSTP1675	1675	1665mm/65,55"	1705mm/67,13"	1660mm/65,35"	-	0,1bar/1,45psi	2"	213mm/8,39"	201,96kg/445,12lbs
TSTP1700	1700	1690mm/66,54"	1730mm/68,11"	1685mm/66,34"	-	0,1bar/1,45psi	2"	213mm/8,39"	202,09kg/445,4lbs
TSTP1725	1725	1715mm/67,52"	1755mm/69,09"	1710mm/67,32"	-	0,1bar/1,45psi	2"	213mm/8,39"	211,6kg/466,36lbs
TSTP1750	1750	1740mm/68,5"	1780mm/70,08"	1735mm/68,31"	-	0,1bar/1,45psi	2"	213mm/8,39"	216,7kg/477,62lbs
TSTP1775	1775	1765mm/69,49"	1805mm/71,06"	1760mm/69,29"	-	0,1bar/1,45psi	2"	213mm/8,39"	220,23kg/485,39lbs
TSTP1800	1800	1790mm/70,47"	1830mm/72,05"	1785mm/70,28"	-	0,1bar/1,45psi	2"	215mm/8,46"	270,02kg/595,12lbs
TSTP1825	1825	1815mm/71,46"	1855mm/73,03"	1810mm/71,26"	-	0,1bar/1,45psi	2"	215mm/8,46"	275,7kg/607,64lbs
TSTP1850	1850	1840mm/72,44"	1880mm/74,02"	1835mm/72,24"	-	0,1bar/1,45psi	2"	215mm/8,46"	286,95kg/632,44lbs
TSTP1875	1875	1865mm/73,43"	1905mm/75"	1860mm/73,23"	-	0,1bar/1,45psi	2"	215mm/8,46"	293,86kg/647,66lbs
TSTP1900	1900	1890mm/74,41"	1930mm/75,98"	1885mm/74,21"	-	0,1bar/1,45psi	2"	215mm/8,46"	301,01kg/663,42lbs
TSTP1925	1925	1915mm/75,39"	1955mm/76,97"	1910mm/75,2"	-	0,1bar/1,45psi	2"	215mm/8,46"	306,04kg/674,51lbs
TSTP1950	1950	1940mm/76,38"	1980mm/77,95"	1935mm/76,18"	-	0,1bar/1,45psi	2"	215mm/8,46"	310,53kg/684,41lbs
TSTP1975	1975	1965mm/77,36"	2005mm/78,94"	1960mm/77,17"	-	0,1bar/1,45psi	2"	215mm/8,46"	318,27kg/701,47lbs
TSTP2000	2000	1990mm/78,35"	2030mm/79,92"	1985mm/78,15"	-	0,1bar/1,45psi	2"	215mm/8,46"	326,39kg/719,37lbs

TENSIONER TOTLIGHT STEEL TEST PLUG

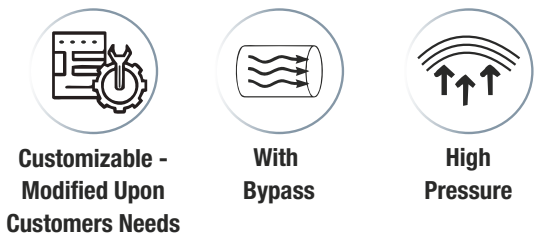

Product Description



Tensioner Totlight Steel Test Plugs are designed for secure sealing, blockage, and testing of large-diameter pipelines.

The plug uses a multi-bolt tensioning system around the steel flange. Tightening the bolts compresses the rubber seal between the steel plates, forcing it to expand against the inner pipe wall and create a strong mechanical seal.

The distributed tensioning points provide more even sealing pressure, improved stability, and reliable performance during pipe testing, blockage, maintenance, and repair operations. The bypass connection allows controlled flow, drainage, and pressure release when required.

This test plug is ideal for use in a variety of applications, including:

- Sanitary systems for air and water testing, temporary sealing, or controlled isolation.
- Sewerage pipelines for maintenance, blockage, testing, or flow management.
- Drainage lines requiring secure pipe-end sealing during inspection or repair works.
- Industrial pipelines requiring reliable sealing, low-pressure testing, or temporary blockage.
- Municipal infrastructure projects for pipe isolation and bypass flow control during repairs or installations.
- Wastewater systems where stable sealing and controlled drainage are required during maintenance operations.

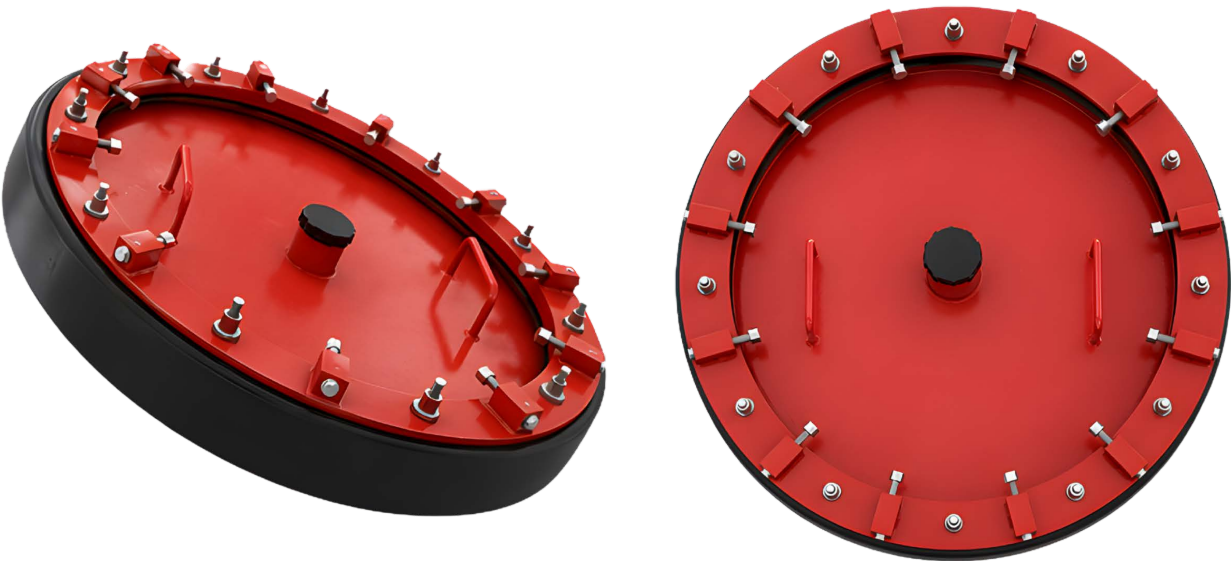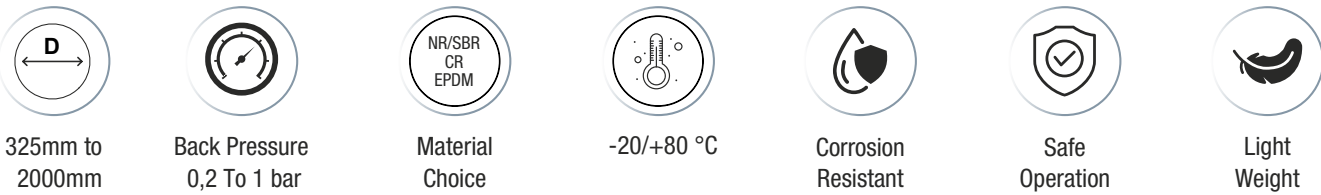

TENSIONER TOTLIGHT STEEL TEST PLUG


TENSIONER TOTLIGHT STEEL TEST PLUGS (0,2BAR/2,9PSI - 1BAR/14,5PSI)

Product Code	Nominal Size (mm)	Min. Pipe Inner Dia. to be tested (mm/Inch)	Max. Pipe Inner Dia. to be tested (mm/Inch)	Product Diameter (mm/Inch)	SCH STD Pipe Inner Diameter (mm/Inch)	Back Pressure (bar/psi)	Bypass Diameter (Inch)	Product Length (mm/Inch)	Product Weight (kg/lbs)
TTSTP325	325	315mm/12,4"	355mm/13,98"	310mm/12,2"	-	1bar/14,5psi	50,80mm/ 2"	130mm/5,12"	9kg/20,55lbs
TTSTP350	350	337mm/13,27"	380mm/14,96"	335mm/13,19"	336,54mm/13,25"	1bar/14,5psi	50,80mm/ 2"	130mm/5,12"	10kg/22,53lbs
TTSTP375	375	365mm/14,37"	405mm/15,94"	360mm/14,17"	-	1bar/14,5psi	50,80mm/ 2"	130mm/5,12"	11kg/24,91lbs
TTSTP400	400	387mm/15,24"	430mm/16,93"	385mm/15,16"	387,34mm/15,25"	1bar/14,5psi	50,80mm/ 2"	130mm/5,12"	12kg/27,39lbs
TTSTP425	425	415mm/16,34"	455mm/17,91"	410mm/16,14"	-	1bar/14,5psi	50,80mm/ 2"	130mm/5,12"	14kg/30lbs
TTSTP450	450	439mm/17,28"	480mm/18,9"	435mm/17,13"	437,94mm/17,24"	0,6bar/8,7psi	50,80mm/ 2"	130mm/5,12"	15kg/32,71lbs
TTSTP475	475	465mm/18,31"	505mm/19,88"	460mm/18,11"	-	0,6bar/8,7psi	50,80mm/ 2"	130mm/5,12"	16kg/35,54lbs
TTSTP500	500	489mm/19,25"	530mm/20,87"	485mm/19,09"	488,94mm/19,25"	0,6bar/8,7psi	50,80mm/ 2"	130mm/5,12"	17kg/38,47lbs
TTSTP525	525	515mm/20,28"	555mm/21,85"	510mm/20,08"	-	0,6bar/8,7psi	50,80mm/ 2"	130mm/5,12"	19kg/41,76lbs
TTSTP550	550	540mm/21,26"	580mm/22,83"	535mm/21,06"	539,94mm/21,26"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	20kg/44,92lbs
TTSTP575	575	565mm/22,24"	605mm/23,82"	560mm/22,05"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	22kg/48,21lbs
TTSTP600	600	590mm/23,23"	630mm/24,8"	585mm/23,03"	590,94mm/23,27"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	23kg/51,65lbs
TTSTP625	625	615mm/24,21"	655mm/25,79"	610mm/24,02"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	25kg/55,11lbs
TTSTP650	650	640mm/25,2"	680mm/26,77"	635mm/25"	640,94mm/25,23"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	27kg/58,72lbs
TTSTP675	675	665mm/26,18"	705mm/27,76"	660mm/25,98"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	29kg/62,91lbs
TTSTP700	700	690mm/27,17"	730mm/28,74"	685mm/26,97"	691,94mm/27,24"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	30kg/66,76lbs
TTSTP725	725	715mm/28,15"	755mm/29,72"	710mm/27,95"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	32kg/70,72lbs
TTSTP750	750	740mm/29,13"	780mm/30,71"	735mm/28,94"	742,94mm/29,25"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	34kg/74,79lbs
TTSTP775	775	765mm/30,12"	805mm/31,69"	760mm/29,92"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	36kg/78,97lbs
TTSTP800	800	790mm/31,1"	830mm/32,68"	785mm/30,91"	793,94mm/31,26"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	39kg/85,74lbs
TTSTP825	825	815mm/32,09"	855mm/33,66"	810mm/31,89"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	44kg/95,89lbs
TTSTP850	850	840mm/33,07"	880mm/34,65"	835mm/32,87"	844,94mm/33,27"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	46kg/100,69lbs
TTSTP875	875	865mm/34,06"	905mm/35,63"	860mm/33,86"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	48kg/105,6lbs
TTSTP900	900	890mm/35,04"	930mm/36,61"	885mm/34,84"	894,94mm/35,23"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	50kg/110,58lbs
TTSTP925	925	915mm/36,02"	955mm/37,6"	910mm/35,83"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	53kg/115,76lbs
TTSTP950	950	940mm/37,01"	980mm/38,58"	935mm/36,81"	945,94mm/37,24"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	55kg/121,18lbs
TTSTP975	975	965mm/37,99"	1005mm/39,57"	960mm/37,8"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	57kg/126,37lbs
TTSTP1000	1000	990mm/38,98"	1030mm/40,55"	985mm/38,78"	996,94mm/39,25"	0,4bar/5,8psi	50,80mm/ 2"	150mm/5,91"	79kg/173,91lbs
TTSTP1025	1025	1015mm/39,96"	1055mm/41,54"	1010mm/39,76"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	82kg/181,12lbs
TTSTP1050	1050	1040mm/40,94"	1080mm/42,52"	1035mm/40,75"	1047,94mm/41,26"	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	90kg/197,71lbs
TTSTP1075	1075	1065mm/41,93"	1105mm/43,5"	1060mm/41,73"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	93kg/204,73lbs
TTSTP1100	1100	1090mm/42,91"	1130mm/44,49"	1085mm/42,72"	1098,94mm/43,27"	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	96kg/212,07lbs
TTSTP1125	1125	1115mm/43,9"	1155mm/45,47"	1110mm/43,7"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	100kg/219,95lbs
TTSTP1150	1150	1140mm/44,88"	1180mm/46,46"	1135mm/44,69"	1148,94mm/45,23"	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	104kg/230,04lbs
TTSTP1175	1175	1165mm/45,87"	1205mm/47,44"	1160mm/45,67"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	108kg/237,71lbs
TTSTP1200	1200	1190mm/46,85"	1230mm/48,43"	1185mm/46,65"	1199,94mm/47,24"	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	112kg/246,37lbs
TTSTP1225	1225	1215mm/47,83"	1255mm/49,41"	1210mm/47,64"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	115kg/254,28lbs
TTSTP1250	1250	1240mm/48,82"	1280mm/50,39"	1235mm/48,62"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	119kg/262,18lbs
TTSTP1275	1275	1265mm/49,8"	1305mm/51,38"	1260mm/49,61"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	123kg/271,71lbs
TTSTP1300	1300	1290mm/50,79"	1330mm/52,36"	1285mm/50,59"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	127kg/279,23lbs
TTSTP1325	1325	1315mm/51,77"	1355mm/53,35"	1310mm/51,57"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	131kg/289,58lbs
TTSTP1350	1350	1340mm/52,76"	1380mm/54,33"	1335mm/52,56"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	135kg/297,31lbs
TTSTP1375	1375	1365mm/53,74"	1405mm/55,31"	1360mm/53,54"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	139kg/305,39lbs
TTSTP1400	1400	1390mm/54,72"	1430mm/56,3"	1385mm/54,53"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	147kg/323,41lbs
TTSTP1425	1425	1415mm/55,71"	1455mm/57,28"	1410mm/55,51"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	151kg/332,94lbs
TTSTP1450	1450	1440mm/56,69"	1480mm/58,27"	1435mm/56,5"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	155kg/341,62lbs
TTSTP1475	1475	1465mm/57,68"	1505mm/59,25"	1460mm/57,48"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	159kg/351,21lbs
TTSTP1500	1500	1490mm/58,66"	1530mm/60,24"	1485mm/58,46"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	191kg/420,39lbs
TTSTP1525	1525	1515mm/59,65"	1555mm/61,22"	1510mm/59,45"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	191kg/420,79lbs
TTSTP1550	1550	1540mm/60,63"	1580mm/62,2"	1535mm/60,43"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	201kg/443,93lbs
TTSTP1575	1575	1565mm/61,61"	1605mm/63,19"	1560mm/61,42"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	205kg/452,59lbs
TTSTP1600	1600	1590mm/62,6"	1630mm/64,17"	1585mm/62,4"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	210kg/463,86lbs
TTSTP1625	1625	1615mm/63,58"	1655mm/65,16"	1610mm/63,39"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	216kg/477,06lbs
TTSTP1650	1650	1640mm/64,57"	1680mm/66,14"	1635mm/64,37"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	220kg/485,13lbs
TTSTP1675	1675	1665mm/65,55"	1705mm/67,13"	1660mm/65,35"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	222kg/489,29lbs
TTSTP1700	1700	1690mm/66,54"	1730mm/68,11"	1685mm/66,34"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	224kg/494,39lbs
TTSTP1725	1725	1715mm/67,52"	1755mm/69,09"	1710mm/67,32"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	233kg/513,75lbs
TTSTP1750	1750	1740mm/68,5"	1780mm/70,08"	1735mm/68,31"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	241kg/530,15lbs
TTSTP1775	1775	1765mm/69,49"	1805mm/71,06"	1760mm/69,29"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	244kg/538,22lbs
TTSTP1800	1800	1790mm/70,47"	1830mm/72,05"	1785mm/70,28"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	300kg/660,58lbs
TTSTP1825	1825	1815mm/71,46"	1855mm/73,03"	1810mm/71,26"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	309kg/680,11lbs
TTSTP1850	1850	1840mm/72,44"	1880mm/74,02"	1835mm/72,24"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	319kg/702lbs
TTSTP1875	1875	1865mm/73,43"	1905mm/75"	1860mm/73,23"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	326kg/719,25lbs
TTSTP1900	1900	1890mm/74,41"	1930mm/75,98"	1885mm/74,21"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	334kg/736,4lbs
TTSTP1925	1925	1915mm/75,39"	1955mm/76,97"	1910mm/75,2"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	337kg/743,72lbs
TTSTP1950	1950	1940mm/76,38"	1980mm/77,95"	1935mm/76,18"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	345kg/759,69lbs
TTSTP1975	1975	1965mm/77,36"	2005mm/78,94"	1960mm/77,17"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	353kg/777,97lbs
TTSTP2000	2000	1990mm/78,35"	2030mm/79,92"	1985mm/78,15"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	362kg/798,5lbs

ALUMINIUM TEST PLUG




Customizable -
Modified Upon
Customers Needs



With
Bypass

Product Description

Lightweight aluminium mechanical plugs for the temporary sealing and low-pressure testing of pipelines. Available from DN40 to DN900 with back pressure ratings up to 2.5 bar (36.26 psi), each plug features an integrated bypass for filling, draining, or air release. Their low weight makes them easy to carry, position, and install by hand — the ideal choice for frequent use, larger diameters, and low-pressure leak testing.



40mm to
900mm



Back Pressure
0,2 to 2,5 Bar



Material
Choice



-20/+80 °C



Corrosion
Resistant



Safe
Operation



Light
Weight

ALUMINIUM TEST PLUGS (0,2BAR/2,9PSI - 2,5BAR/36,26PSI)

Product Code	Nominal Size (mm)	Min. Pipe Inner Dia. to be tested (mm/inch)	Max. Pipe Inner Dia. to be tested (mm/inch)	Product Diameter (mm/inch)	SCH STD Pipe Inner Diameter (mm/inch)	Back Pressure (bar/psi)	Bypass Diameter (inch)	Product Length (mm/inch)	Product Weight (kg/lbs)
ATP40	40	39mm/1,54"	53mm/2,09"	38mm/1,5"	40,94mm/1,61"	2,5bar/36,26psi	12,70mm/ 1/2"	85mm/3,35"	0,17kg/0,37lbs
ATP50	50	51mm/2,01"	66mm/2,6"	50mm/1,97"	52,48mm/2,07"	2,5bar/36,26psi	12,70mm/ 1/2"	85mm/3,35"	0,22kg/0,48lbs
ATP65	65	61mm/2,4"	79mm/3,11"	60mm/2,36"	62,68mm/2,47"	2,5bar/36,26psi	12,70mm/ 1/2"	85mm/3,35"	0,27kg/0,6lbs
ATP80	80	76mm/2,99"	89mm/3,5"	75mm/2,95"	77,92mm/3,07"	1,5bar/21,76psi	12,70mm/ 1/2"	85mm/3,35"	0,4kg/0,88lbs
ATP90	90	85mm/3,35"	103mm/4,06"	84mm/3,31"	90,12mm/3,55"	1bar/14,5psi	12,70mm/ 1/2"	85mm/3,35"	0,5kg/1,1lbs
ATP100	100	99mm/3,9"	112mm/4,41"	98mm/3,86"	102,26mm/4,03"	0,7bar/10,15psi	12,70mm/ 1/2"	85mm/3,35"	0,8kg/1,76lbs
ATP115	115	110mm/4,33"	128mm/5,04"	109mm/4,29"	117mm/4,61"	0,7bar/10,15psi	12,70mm/ 1/2"	85mm/3,35"	1,2kg/2,64lbs
ATP125	125	126mm/4,96"	139mm/5,47"	125mm/4,92"	128,2mm/5,05"	0,7bar/10,15psi	12,70mm/ 1/2"	85mm/3,35"	1,3kg/2,87lbs
ATP140	140	135mm/5,31"	152mm/5,98"	134mm/5,28"	141mm/5,55"	0,7bar/10,15psi	12,70mm/ 1/2"	85mm/3,35"	1,5kg/3,31lbs
ATP150	150	149mm/5,87"	164mm/6,46"	148mm/5,83"	154,08mm/6,07"	0,5bar/7,25psi	12,70mm/ 1/2"	85mm/3,35"	1,5kg/3,31lbs
ATP175	175	171mm/6,73"	196mm/7,72"	170mm/6,69"	178mm/7,01"	0,5bar/7,25psi	25,40mm/ 1"	139mm/5,47"	2,2kg/4,85lbs
ATP200	200	195mm/7,68"	218mm/8,58"	194mm/7,64"	202,64mm/7,98"	0,5bar/7,25psi	25,40mm/ 1"	134,5mm/5,3"	2,6kg/5,73lbs
ATP225	225	219mm/8,62"	245mm/9,65"	218mm/8,58"	227mm/8,94"	0,5bar/7,25psi	25,40mm/ 1"	134,5mm/5,3"	3,2kg/7,05lbs
ATP250	250	246mm/9,69"	290mm/11,42"	244mm/9,61"	254,46mm/10,02"	0,5bar/7,25psi	25,40mm/ 1"	176mm/6,93"	3,6kg/7,93lbs
ATP275	275	272mm/10,71"	305mm/12,01"	270mm/10,63"	279mm/10,98"	0,5bar/7,25psi	25,40mm/ 1"	200,75mm/7,9"	4kg/8,82lbs
ATP300	300	297mm/11,69"	335mm/13,19"	295mm/11,61"	304,84mm/12"	0,5bar/7,25psi	25,40mm/ 1"	208,75mm/8,22"	4,5kg/9,92lbs
ATP325	325	315mm/12,4"	355mm/13,98"	310mm/12,2"	-	0,5bar/7,25psi	25,40mm/ 1"	130mm/5,12"	5kg/11,02lbs
ATP350	350	337mm/13,27"	380mm/14,96"	335mm/13,19"	336,54mm/13,25"	0,5bar/7,25psi	25,40mm/ 1"	130mm/5,12"	5,5kg/12,12lbs
ATP375	375	365mm/14,37"	405mm/15,94"	360mm/14,17"	-	0,3bar/4,35psi	25,40mm/ 1"	130mm/5,12"	6kg/13,22lbs
ATP400	400	387mm/15,24"	430mm/16,93"	385mm/15,16"	387,34mm/15,25"	0,3bar/4,35psi	25,40mm/ 1"	130mm/5,12"	6,6kg/14,55lbs
ATP425	425	415mm/16,34"	455mm/17,91"	410mm/16,14"	-	0,3bar/4,35psi	25,40mm/ 1"	130mm/5,12"	7,5kg/16,53lbs
ATP450	450	438mm/17,24"	480mm/18,9"	435mm/17,13"	437,94mm/17,24"	0,3bar/4,35psi	25,40mm/ 1"	130mm/5,12"	8,2kg/18,07lbs
ATP475	475	465mm/18,31"	505mm/19,88"	460mm/18,11"	-	0,3bar/4,35psi	25,40mm/ 1"	130mm/5,12"	10kg/22,04lbs
ATP500	500	489mm/19,25"	530mm/20,87"	485mm/19,09"	488,94mm/19,25"	0,3bar/4,35psi	50,80mm/ 2"	130mm/5,12"	11,8kg/26,01lbs
ATP525	525	515mm/20,28"	555mm/21,85"	510mm/20,08"	-	0,3bar/4,35psi	50,80mm/ 2"	130mm/5,12"	12,5kg/27,55lbs
ATP550	550	540mm/21,26"	580mm/22,83"	535mm/21,06"	539,94mm/21,26"	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	13,1kg/28,87lbs
ATP575	575	565mm/22,24"	605mm/23,82"	560mm/22,05"	-	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	15kg/33,06lbs
ATP600	600	590mm/23,23"	630mm/24,8"	585mm/23,03"	590,94mm/23,27"	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	16,6kg/36,59lbs
ATP625	625	615mm/24,21"	655mm/25,79"	610mm/24,02"	-	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	19kg/41,88lbs
ATP650	650	640mm/25,2"	680mm/26,77"	635mm/25"	640,94mm/25,23"	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	21kg/46,28lbs
ATP675	675	665mm/26,18"	705mm/27,76"	660mm/25,98"	-	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	25kg/55,1lbs
ATP700	700	690mm/27,17"	730mm/28,74"	685mm/26,97"	691,94mm/27,24"	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	29kg/63,92lbs
ATP725	725	715mm/28,15"	755mm/29,72"	710mm/27,95"	-	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	30,5kg/67,22lbs
ATP750	750	740mm/29,13"	780mm/30,71"	735mm/28,94"	742,94mm/29,25"	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	32kg/70,53lbs
ATP775	775	765mm/30,12"	805mm/31,69"	760mm/29,92"	-	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	33,5kg/73,83lbs
ATP800	800	790mm/31,1"	830mm/32,68"	785mm/30,91"	793,94mm/31,26"	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	35kg/77,14lbs
ATP825	825	815mm/32,09"	855mm/33,66"	810mm/31,89"	-	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	36,5kg/80,45lbs
ATP850	850	840mm/33,07"	880mm/34,65"	835mm/32,87"	844,94mm/33,27"	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	38kg/83,75lbs
ATP875	875	865mm/34,06"	905mm/35,63"	860mm/33,86"	-	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	39,5kg/87,06lbs
ATP900	900	890mm/35,04"	930mm/36,61"	885mm/34,84"	894,94mm/35,23"	0,2bar/2,9psi	50,80mm/ 2"	130mm/5,12"	40,6kg/89,48lbs


ALUMINIUM TEST PLUG



TOTTIGHT ALUMINIUM TEST PLUGS



Customizable -
Modified Upon
Customers Needs




With
Bypass

Product Description

Tottight Aluminium Test Plugs are designed for large-diameter pipe-end sealing, temporary blockage, and low-pressure testing. Produced with a lightweight aluminium body and rubber sealing element, the plug uses a Tottight tightening system to compress the seal between the aluminium plates. This compression expands the rubber seal against the internal pipe wall, providing stable and secure mechanical sealing. The bypass connection allows controlled filling, drainage, pressure release, or flow management during operation.

This test plug is ideal for use in a variety of applications, including:

- Sanitary systems for air and water testing, temporary sealing, or controlled isolation.
- Sewerage pipelines for maintenance, blockage, testing, or flow management.
- Drainage lines requiring secure pipe-end sealing during inspection or repair works.
- Industrial pipelines requiring reliable sealing, low-pressure testing, or temporary blockage.
- Municipal infrastructure projects for pipe isolation and bypass flow control during repairs or installations.
- Wastewater systems where lightweight handling, stable sealing, and controlled drainage are required during maintenance operations.



325mm to
2000mm



Back Pressure
0,1 To 0,5 bar



Material
Choice



-20/+80 °C



Corrosion
Resistant



Safe
Operation



Light
Weight



TOTTIGHT ALUMINIUM TEST PLUGS


TOTTIGHT ALUMINIUM TEST PLUGS (0,1BAR/1,45PSI - 0,5BAR/7,25PSI)

Product Code	Nomin al Size (mm)	Min. Pipe Inner Dia. to be tested (mm/inch)	Max. Pipe Inner Dia. to be tested (mm/inch)	Product Diameter (mm/inch)	SCH STD Pipe Inner Diameter (mm/inch)	Back Pressure (bar/psi)	Bypass Diameter (inch)	Product Length (mm/inch)	Product Weight (kg/lbs)
TATP325	325	315mm/12,4"	355mm/13,98"	310mm/12,2"	-	0,5bar/7,25psi	50,80mm/ 2"	126,4mm/4,98"	6,2kg/13,66lbs
TATP350	350	337mm/13,27"	380mm/14,96"	335mm/13,19"	336,54mm/13,25"	0,5bar/7,25psi	50,80mm/ 2"	126,4mm/4,98"	6,5kg/14,33lbs
TATP375	375	365mm/14,37"	405mm/15,94"	360mm/14,17"	-	0,5bar/7,25psi	50,80mm/ 2"	126,4mm/4,98"	6,6kg/14,55lbs
TATP400	400	387mm/15,24"	430mm/16,93"	385mm/15,16"	387,34mm/15,25"	0,5bar/7,25psi	50,80mm/ 2"	126,4mm/4,98"	6,7kg/14,77lbs
TATP425	425	415mm/16,34"	455mm/17,91"	410mm/16,14"	-	0,5bar/7,25psi	50,80mm/ 2"	126,4mm/4,98"	7,7kg/16,97lbs
TATP450	450	438mm/17,24"	480mm/18,9"	435mm/17,13"	437,94mm/17,24"	0,3bar/4,35psi	50,80mm/ 2"	126,4mm/4,98"	8,5kg/18,73lbs
TATP475	475	465mm/18,31"	505mm/19,88"	460mm/18,11"	-	0,3bar/4,35psi	50,80mm/ 2"	126,4mm/4,98"	9kg/19,84lbs
TATP500	500	489mm/19,25"	530mm/20,87"	485mm/19,09"	488,94mm/19,25"	0,3bar/4,35psi	50,80mm/ 2"	126,4mm/4,98"	9,5kg/20,94lbs
TATP525	525	515mm/20,28"	555mm/21,85"	510mm/20,08"	-	0,3bar/4,35psi	50,80mm/ 2"	126,4mm/4,98"	10kg/22,04lbs
TATP550	550	540mm/21,26"	580mm/22,83"	535mm/21,06"	539,94mm/21,26"	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	10,5kg/23,14lbs
TATP575	575	565mm/22,24"	605mm/23,82"	560mm/22,05"	-	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	12kg/26,45lbs
TATP600	600	590mm/23,23"	630mm/24,8"	585mm/23,03"	590,94mm/23,27"	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	13,5kg/29,75lbs
TATP625	625	615mm/24,21"	655mm/25,79"	610mm/24,02"	-	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	15kg/33,06lbs
TATP650	650	640mm/25,2"	680mm/26,77"	635mm/25"	640,94mm/25,23"	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	16,5kg/36,37lbs
TATP675	675	665mm/26,18"	705mm/27,76"	660mm/25,98"	-	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	18kg/39,67lbs
TATP700	700	690mm/27,17"	730mm/28,74"	685mm/26,97"	691,94mm/27,24"	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	19,5kg/42,98lbs
TATP725	725	715mm/28,15"	755mm/29,72"	710mm/27,95"	-	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	21kg/46,28lbs
TATP750	750	740mm/29,13"	780mm/30,71"	735mm/28,94"	742,94mm/29,25"	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	22,5kg/49,59lbs
TATP775	775	765mm/30,12"	805mm/31,69"	760mm/29,92"	-	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	24kg/52,9lbs
TATP800	800	790mm/31,1"	830mm/32,68"	785mm/30,91"	793,94mm/31,26"	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	25,5kg/56,2lbs
TATP825	825	815mm/32,09"	855mm/33,66"	810mm/31,89"	-	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	27,2kg/59,95lbs
TATP850	850	840mm/33,07"	880mm/34,65"	835mm/32,87"	844,94mm/33,27"	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	28,7kg/63,25lbs
TATP875	875	865mm/34,06"	905mm/35,63"	860mm/33,86"	-	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	30,2kg/66,56lbs
TATP900	900	890mm/35,04"	930mm/36,61"	885mm/34,84"	894,94mm/35,23"	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	31,8kg/70,09lbs
TATP925	925	915mm/36,02"	955mm/37,6"	910mm/35,83"	-	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	33,2kg/73,17lbs
TATP950	950	940mm/37,01"	980mm/38,58"	935mm/36,81"	945,94mm/37,24"	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	34,8kg/76,7lbs
TATP975	975	965mm/37,99"	1005mm/39,57"	960mm/37,8"	-	0,2bar/2,9psi	50,80mm/ 2"	126,4mm/4,98"	36,3kg/80,01lbs
TATP1000	1000	990mm/38,98"	1030mm/40,55"	985mm/38,78"	996,94mm/39,25"	0,2bar/2,9psi	50,80mm/ 2"	160mm/6,3"	37,8kg/83,31lbs
TATP1025	1025	1015mm/39,96"	1055mm/41,54"	1010mm/39,76"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	39,4kg/86,84lbs
TATP1050	1050	1040mm/40,94"	1080mm/42,52"	1035mm/40,75"	1047,94mm/41,26"	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	40,9kg/90,14lbs
TATP1075	1075	1065mm/41,93"	1105mm/43,5"	1060mm/41,73"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	42,4kg/93,45lbs
TATP1100	1100	1090mm/42,91"	1130mm/44,49"	1085mm/42,72"	1098,94mm/43,27"	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	43,9kg/96,76lbs
TATP1125	1125	1115mm/43,9"	1155mm/45,47"	1110mm/43,7"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	45,4kg/100,06lbs
TATP1150	1150	1140mm/44,88"	1180mm/46,46"	1135mm/44,69"	1148,94mm/45,23"	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	47kg/103,59lbs
TATP1175	1175	1165mm/45,87"	1205mm/47,44"	1160mm/45,67"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	48,5kg/106,89lbs
TATP1200	1200	1190mm/46,85"	1230mm/48,43"	1185mm/46,65"	1199,94mm/47,24"	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	50kg/110,2lbs
TATP1225	1225	1215mm/47,83"	1255mm/49,41"	1210mm/47,64"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	52,8kg/116,37lbs
TATP1250	1250	1240mm/48,82"	1280mm/50,39"	1235mm/48,62"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	55,5kg/122,32lbs
TATP1275	1275	1265mm/49,8"	1305mm/51,38"	1260mm/49,61"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	58,3kg/128,49lbs
TATP1300	1300	1290mm/50,79"	1330mm/52,36"	1285mm/50,59"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	61kg/134,44lbs
TATP1325	1325	1315mm/51,77"	1355mm/53,35"	1310mm/51,57"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	63,77kg/140,55lbs
TATP1350	1350	1340mm/52,76"	1380mm/54,33"	1335mm/52,56"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	66,52kg/146,61lbs
TATP1375	1375	1365mm/53,74"	1405mm/55,31"	1360mm/53,54"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	69,27kg/152,67lbs
TATP1400	1400	1390mm/54,72"	1430mm/56,3"	1385mm/54,53"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	72,02kg/158,73lbs
TATP1425	1425	1415mm/55,71"	1455mm/57,28"	1410mm/55,51"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	74,77kg/164,79lbs
TATP1450	1450	1440mm/56,69"	1480mm/58,27"	1435mm/56,5"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	77,52kg/170,85lbs
TATP1475	1475	1465mm/57,68"	1505mm/59,25"	1460mm/57,48"	-	0,1bar/1,45psi	50,80mm/ 2"	160mm/6,3"	80,27kg/176,92lbs
TATP1500	1500	1490mm/58,66"	1530mm/60,24"	1485mm/58,46"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	83kg/182,93lbs
TATP1525	1525	1515mm/59,65"	1555mm/61,22"	1510mm/59,45"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	86,1kg/189,76lbs
TATP1550	1550	1540mm/60,63"	1580mm/62,2"	1535mm/60,43"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	89,2kg/196,6lbs
TATP1575	1575	1565mm/61,61"	1605mm/63,19"	1560mm/61,42"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	92,3kg/203,43lbs
TATP1600	1600	1590mm/62,6"	1630mm/64,17"	1585mm/62,4"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	95,4kg/210,26lbs
TATP1625	1625	1615mm/63,58"	1655mm/65,16"	1610mm/63,39"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	98,5kg/217,09lbs
TATP1650	1650	1640mm/64,57"	1680mm/66,14"	1635mm/64,37"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	101,6kg/223,93lbs
TATP1675	1675	1665mm/65,55"	1705mm/67,13"	1660mm/65,35"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	104,7kg/230,76lbs
TATP1700	1700	1690mm/66,54"	1730mm/68,11"	1685mm/66,34"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	107,8kg/237,59lbs
TATP1725	1725	1715mm/67,52"	1755mm/69,09"	1710mm/67,32"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	110,9kg/244,42lbs
TATP1750	1750	1740mm/68,5"	1780mm/70,08"	1735mm/68,31"	-	0,1bar/1,45psi	50,80mm/ 2"	215mm/8,46"	114kg/251,26lbs
TATP1775	1775	1765mm/69,49"	1805mm/71,06"	1760mm/69,29"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,39"	117,1kg/258,09lbs
TATP1800	1800	1790mm/70,47"	1830mm/72,05"	1785mm/70,28"	-	0,1bar/1,45psi	50,80mm/ 2"	215mm/8,46"	120,2kg/264,92lbs
TATP1825	1825	1815mm/71,46"	1855mm/73,03"	1810mm/71,26"	-	0,1bar/1,45psi	50,80mm/ 2"	213mm/8,46"	123,3kg/271,75lbs
TATP1850	1850	1840mm/72,44"	1880mm/74,02"	1835mm/72,24"	-	0,1bar/1,45psi	50,80mm/ 2"	215mm/8,46"	126,4kg/278,59lbs
TATP1875	1875	1865mm/73,43"	1905mm/75"	1860mm/73,23"	-	0,1bar/1,45psi	50,80mm/ 2"	215mm/8,46"	129,5kg/285,42lbs
TATP1900	1900	1890mm/74,41"	1930mm/75,98"	1885mm/74,21"	-	0,1bar/1,45psi	50,80mm/ 2"	215mm/8,46"	132,6kg/292,25lbs
TATP1925	1925	1915mm/75,39"	1955mm/76,97"	1910mm/75,2"	-	0,1bar/1,45psi	50,80mm/ 2"	215mm/8,46"	135,7kg/299,08lbs
TATP1950	1950	1940mm/76,38"	1980mm/77,95"	1935mm/76,18"	-	0,1bar/1,45psi	50,80mm/ 2"	215mm/8,46"	138,8kg/305,92lbs
TATP1975	1975	1965mm/77,36"	2005mm/78,94"	1960mm/77,17"	-	0,1bar/1,45psi	50,80mm/ 2"	215mm/8,46"	141,9kg/312,75lbs
TATP2000	2000	1990mm/78,35"	2030mm/79,92"	1985mm/78,15"	-	0,1bar/1,45psi	50,80mm/ 2"	215mm/8,46"	145kg/319,58lbs

TENSIONER TOTLIGHT ALUMINIUM TEST PLUGS



Customizable -
Modified Upon
Customers Needs



With
Bypass


Product Description

Tensioner Totlight Aluminium Test Plugs are designed for lightweight large-diameter pipe-end sealing, blockage, and low-pressure testing.

The plug uses a dual-action tensioning system: vertical bolts compress the rubber seal between aluminium plates, expanding it against the pipe wall, while horizontal bolts press directly against the pipe wall for better grip, centering, and stability. The aluminium body reduces weight, making handling, positioning, installation, and removal easier on site.

Choose the aluminium version when the application requires:

- Lighter product weight
- Easier handling and installation
- Faster positioning on site
- Reduced manpower requirement
- Frequent installation and removal
- Low-pressure testing or temporary blockage



325mm to
2000mm



Back Pressure
0,2 To 1,0 bar



Material
Choice



-20/+80 °C



Corrosion
Resistant



Safe
Operation




Light
Weight



TENSIONER TOTLIGHT ALUMINIUM TEST PLUGS

TENSIONER TOTLIGHT ALUMINIUM TEST PLUGS (0,2BAR/2,9PSI - 2,5BAR/36,26PSI)

Product Code	Nominal Size (mm)	Min. Pipe Inner Dia. to be tested (mm/inch)	Max. Pipe Inner Dia. to be tested (mm/inch)	Product Diameter (mm/inch)	SCH STD Pipe Inner Diameter (mm/inch)	Back Pressure (bar/psi)	Bypass Diameter (inch)	Product Length (mm/inch)	Product Weight (kg/lbs)
TTATP325	325	315mm/12,4"	355mm/13,98"	310mm/12,2"	-	1bar/14,5psi	50,80mm/ 2"	130mm/5,12"	7,02kg/15,48lbs
TTATP350	350	337mm/13,27"	380mm/14,96"	335mm/13,19"	336,54mm/13,25"	1bar/14,5psi	50,80mm/ 2"	130mm/5,12"	7,72kg/17,02lbs
TTATP375	375	365mm/14,37"	405mm/15,94"	360mm/14,17"	-	1bar/14,5psi	50,80mm/ 2"	130mm/5,12"	8,46kg/18,64lbs
TTATP400	400	387mm/15,24"	430mm/16,93"	385mm/15,16"	387,34mm/15,25"	1bar/14,5psi	50,80mm/ 2"	130mm/5,12"	9,22kg/20,32lbs
TTATP425	425	415mm/16,34"	455mm/17,91"	410mm/16,14"	-	1bar/14,5psi	50,80mm/ 2"	130mm/5,12"	10,02kg/22,08lbs
TTATP450	450	439mm/17,28"	480mm/18,9"	435mm/17,13"	437,94mm/17,24"	0,6bar/8,7psi	50,80mm/ 2"	130mm/5,12"	10,85kg/23,9lbs
TTATP475	475	465mm/18,31"	505mm/19,88"	460mm/18,11"	-	0,6bar/8,7psi	50,80mm/ 2"	130mm/5,12"	11,77kg/25,94lbs
TTATP500	500	489mm/19,25"	530mm/20,87"	485mm/19,09"	488,94mm/19,25"	0,6bar/8,7psi	50,80mm/ 2"	130mm/5,12"	12,66kg/27,91lbs
TTATP525	525	515mm/20,28"	555mm/21,85"	510mm/20,08"	-	0,6bar/8,7psi	50,80mm/ 2"	130mm/5,12"	13,59kg/29,95lbs
TTATP550	550	540mm/21,26"	580mm/22,83"	535mm/21,06"	539,94mm/21,26"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	14,56kg/32,09lbs
TTATP575	575	565mm/22,24"	605mm/23,82"	560mm/22,05"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	15,53kg/34,24lbs
TTATP600	600	590mm/23,23"	630mm/24,8"	585mm/23,03"	590,94mm/23,27"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	16,55kg/36,49lbs
TTATP625	625	615mm/24,21"	655mm/25,79"	610mm/24,02"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	17,74kg/39,09lbs
TTATP650	650	640mm/25,2"	680mm/26,77"	635mm/25"	640,94mm/25,23"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	18,82kg/41,48lbs
TTATP675	675	665mm/26,18"	705mm/27,76"	660mm/25,98"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	19,94kg/43,94lbs
TTATP700	700	690mm/27,17"	730mm/28,74"	685mm/26,97"	691,94mm/27,24"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	21,08kg/46,47lbs
TTATP725	725	715mm/28,15"	755mm/29,72"	710mm/27,95"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	22,26kg/49,07lbs
TTATP750	750	740mm/29,13"	780mm/30,71"	735mm/28,94"	742,94mm/29,25"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	24,17kg/53,27lbs
TTATP775	775	765mm/30,12"	805mm/31,69"	760mm/29,92"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	27,03kg/59,58lbs
TTATP800	800	790mm/31,1"	830mm/32,68"	785mm/30,91"	793,94mm/31,26"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	28,38kg/62,56lbs
TTATP825	825	815mm/32,09"	855mm/33,66"	810mm/31,89"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	29,77kg/65,61lbs
TTATP850	850	840mm/33,07"	880mm/34,65"	835mm/32,87"	844,94mm/33,27"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	31,17kg/68,71lbs
TTATP875	875	865mm/34,06"	905mm/35,63"	860mm/33,86"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	32,63kg/71,92lbs
TTATP900	900	890mm/35,04"	930mm/36,61"	885mm/34,84"	894,94mm/35,23"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	34,16kg/75,29lbs
TTATP925	925	915mm/36,02"	955mm/37,6"	910mm/35,83"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	35,62kg/78,51lbs
TTATP950	950	940mm/37,01"	980mm/38,58"	935mm/36,81"	945,94mm/37,24"	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	39,49kg/87,04lbs
TTATP975	975	965mm/37,99"	1005mm/39,57"	960mm/37,8"	-	0,4bar/5,8psi	50,80mm/ 2"	130mm/5,12"	41,13kg/90,65lbs
TTATP1000	1000	990mm/38,98"	1030mm/40,55"	985mm/38,78"	996,94mm/39,25"	0,4bar/5,8psi	50,80mm/ 2"	150mm/5,91"	44,9kg/98,95lbs
TTATP1025	1025	1015mm/39,96"	1055mm/41,54"	1010mm/39,76"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	46,49kg/102,47lbs
TTATP1050	1050	1040mm/40,94"	1080mm/42,52"	1035mm/40,75"	1047,94mm/41,26"	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	48,16kg/106,14lbs
TTATP1075	1075	1065mm/41,93"	1105mm/43,5"	1060mm/41,73"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	49,95kg/110,09lbs
TTATP1100	1100	1090mm/42,91"	1130mm/44,49"	1085mm/42,72"	1098,94mm/43,27"	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	52,24kg/115,13lbs
TTATP1125	1125	1115mm/43,9"	1155mm/45,47"	1110mm/43,7"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	53,98kg/118,98lbs
TTATP1150	1150	1140mm/44,88"	1180mm/46,46"	1135mm/44,69"	1148,94mm/45,23"	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	55,95kg/123,31lbs
TTATP1175	1175	1165mm/45,87"	1205mm/47,44"	1160mm/45,67"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	57,74kg/127,27lbs
TTATP1200	1200	1190mm/46,85"	1230mm/48,43"	1185mm/46,65"	1199,94mm/47,24"	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	59,54kg/131,22lbs
TTATP1225	1225	1215mm/47,83"	1255mm/49,41"	1210mm/47,64"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	61,7kg/135,99lbs
TTATP1250	1250	1240mm/48,82"	1280mm/50,39"	1235mm/48,62"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	63,41kg/139,75lbs
TTATP1275	1275	1265mm/49,8"	1305mm/51,38"	1260mm/49,61"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	65,76kg/144,93lbs
TTATP1300	1300	1290mm/50,79"	1330mm/52,36"	1285mm/50,59"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	67,52kg/148,8lbs
TTATP1325	1325	1315mm/51,77"	1355mm/53,35"	1310mm/51,57"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	69,35kg/152,85lbs
TTATP1350	1350	1340mm/52,76"	1380mm/54,33"	1335mm/52,56"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	73,44kg/161,87lbs
TTATP1375	1375	1365mm/53,74"	1405mm/55,31"	1360mm/53,54"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	75,61kg/166,64lbs
TTATP1400	1400	1390mm/54,72"	1430mm/56,3"	1385mm/54,53"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	77,58kg/170,98lbs
TTATP1425	1425	1415mm/55,71"	1455mm/57,28"	1410mm/55,51"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	79,76kg/175,78lbs
TTATP1450	1450	1440mm/56,69"	1480mm/58,27"	1435mm/56,5"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	81,83kg/180,35lbs
TTATP1475	1475	1465mm/57,68"	1505mm/59,25"	1460mm/57,48"	-	0,2bar/2,9psi	50,80mm/ 2"	150mm/5,91"	81,9kg/180,52lbs
TTATP1500	1500	1490mm/58,66"	1530mm/60,24"	1485mm/58,46"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	86,41kg/190,45lbs
TTATP1525	1525	1515mm/59,65"	1555mm/61,22"	1510mm/59,45"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	88,1kg/194,16lbs
TTATP1550	1550	1540mm/60,63"	1580mm/62,2"	1535mm/60,43"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	90,29kg/199lbs
TTATP1575	1575	1565mm/61,61"	1605mm/63,19"	1560mm/61,42"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	92,86kg/204,66lbs
TTATP1600	1600	1590mm/62,6"	1630mm/64,17"	1585mm/62,4"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	94,43kg/208,12lbs
TTATP1625	1625	1615mm/63,58"	1655mm/65,16"	1610mm/63,39"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	95,24kg/209,9lbs
TTATP1650	1650	1640mm/64,57"	1680mm/66,14"	1635mm/64,37"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	96,23kg/212,09lbs
TTATP1675	1675	1665mm/65,55"	1705mm/67,13"	1660mm/65,35"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	100kg/220,4lbs
TTATP1700	1700	1690mm/66,54"	1730mm/68,11"	1685mm/66,34"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	103,19kg/227,44lbs
TTATP1725	1725	1715mm/67,52"	1755mm/69,09"	1710mm/67,32"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	104,76kg/230,9lbs
TTATP1750	1750	1740mm/68,5"	1780mm/70,08"	1735mm/68,31"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	128,58kg/283,39lbs
TTATP1775	1775	1765mm/69,49"	1805mm/71,06"	1760mm/69,29"	-	0,2bar/2,9psi	50,80mm/ 2"	195mm/7,68"	132,38kg/291,77lbs
TTATP1800	1800	1790mm/70,47"	1830mm/72,05"	1785mm/70,28"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	136,64kg/301,16lbs
TTATP1825	1825	1815mm/71,46"	1855mm/73,03"	1810mm/71,26"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	140kg/308,56lbs
TTATP1850	1850	1840mm/72,44"	1880mm/74,02"	1835mm/72,24"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	143,34kg/315,92lbs
TTATP1875	1875	1865mm/73,43"	1905mm/75"	1860mm/73,23"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	144,76kg/319,06lbs
TTATP1900	1900	1890mm/74,41"	1930mm/75,98"	1885mm/74,21"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	147,87kg/325,91lbs
TTATP1925	1925	1915mm/75,39"	1955mm/76,97"	1910mm/75,2"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	151,43kg/333,75lbs
TTATP1950	1950	1940mm/76,38"	1980mm/77,95"	1935mm/76,18"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	155,42kg/342,56lbs
TTATP1975	1975	1965mm/77,36"	2005mm/78,94"	1960mm/77,17"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	159,13kg/350,72lbs
TTATP2000	2000	1990mm/78,35"	2030mm/79,92"	1985mm/78,15"	-	0,2bar/2,9psi	50,80mm/ 2"	215mm/8,46"	162,91kg/359,04lbs

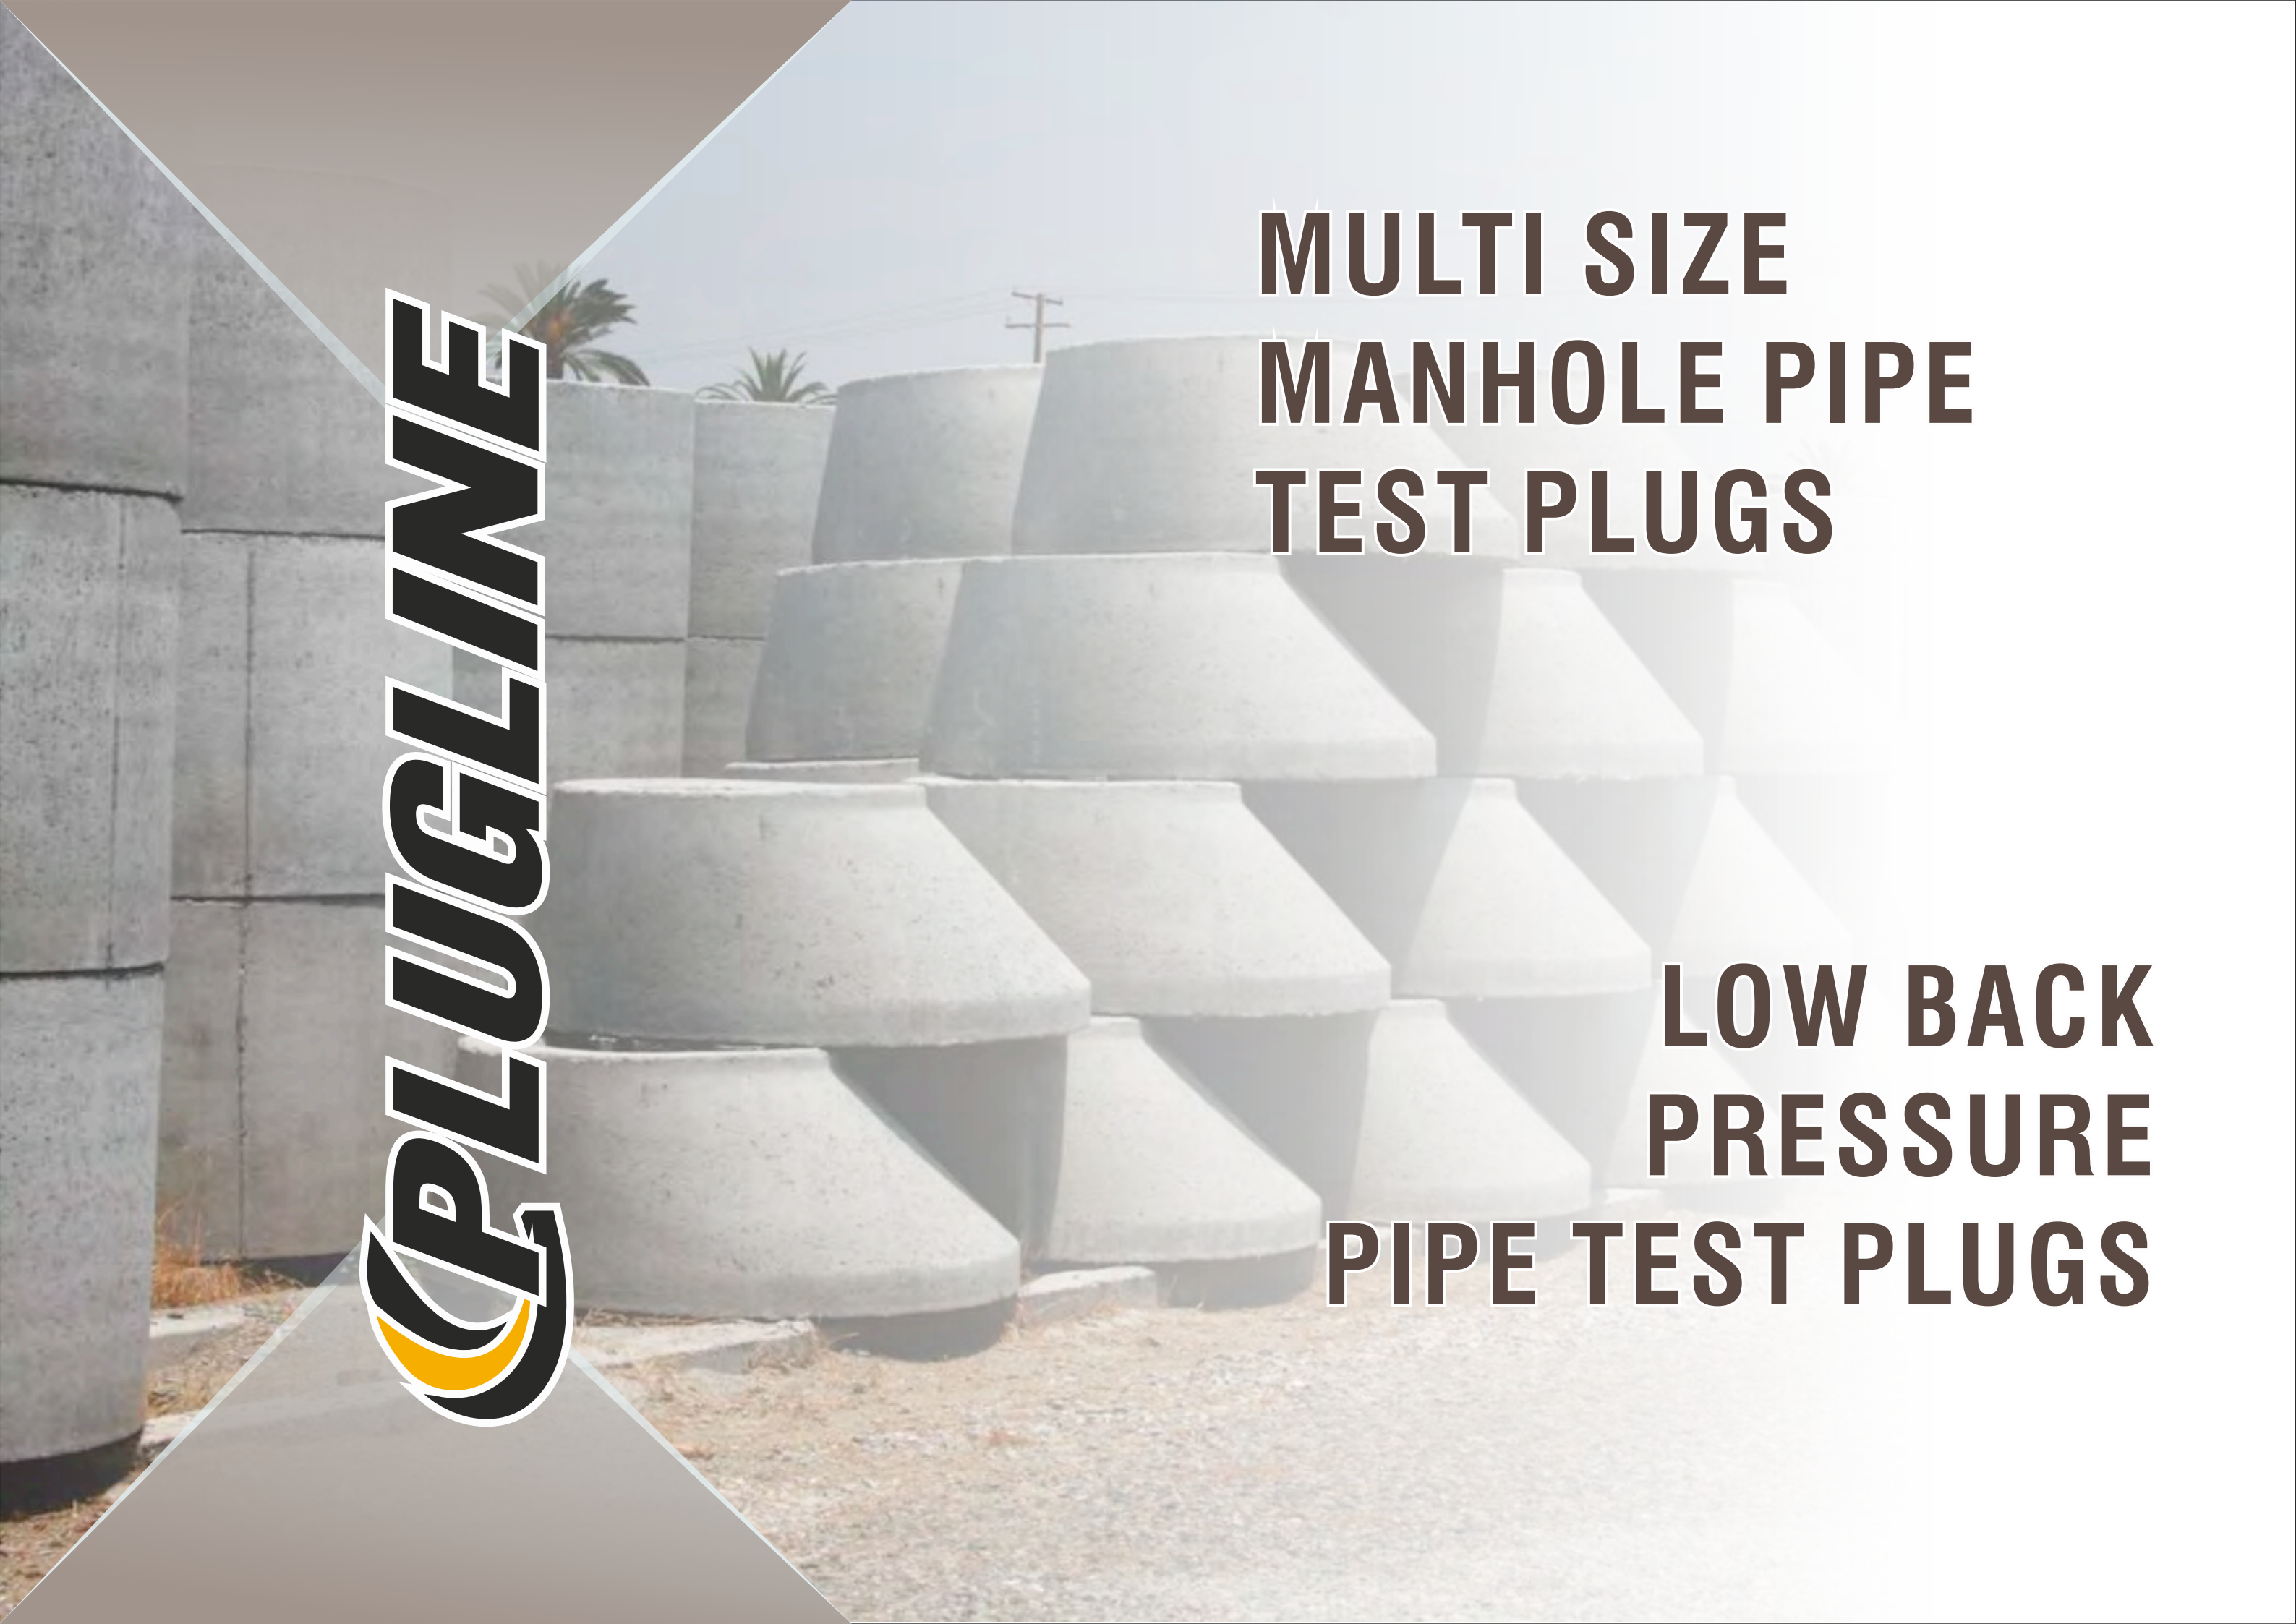The background of the entire image is a photograph of numerous large, grey, conical concrete pipe test plugs stacked in several rows. The plugs are arranged in a way that shows their tapered shape and how they interlock. In the background, some palm trees and a utility pole are visible under a clear sky. The image is framed by a diagonal split: the top-left and bottom-left corners are a solid brown color, while the rest is the photograph.

CELINE

**MULTI SIZE
MANHOLE PIPE
TEST PLUGS**

**LOW BACK
PRESSURE
PIPE TEST PLUGS**